



| ITEM | AUTH | DESCRIPTION | REVISIONS | DATE | APPROVED |
|------|------|-------------|-----------|------|----------|
| | | | | | |



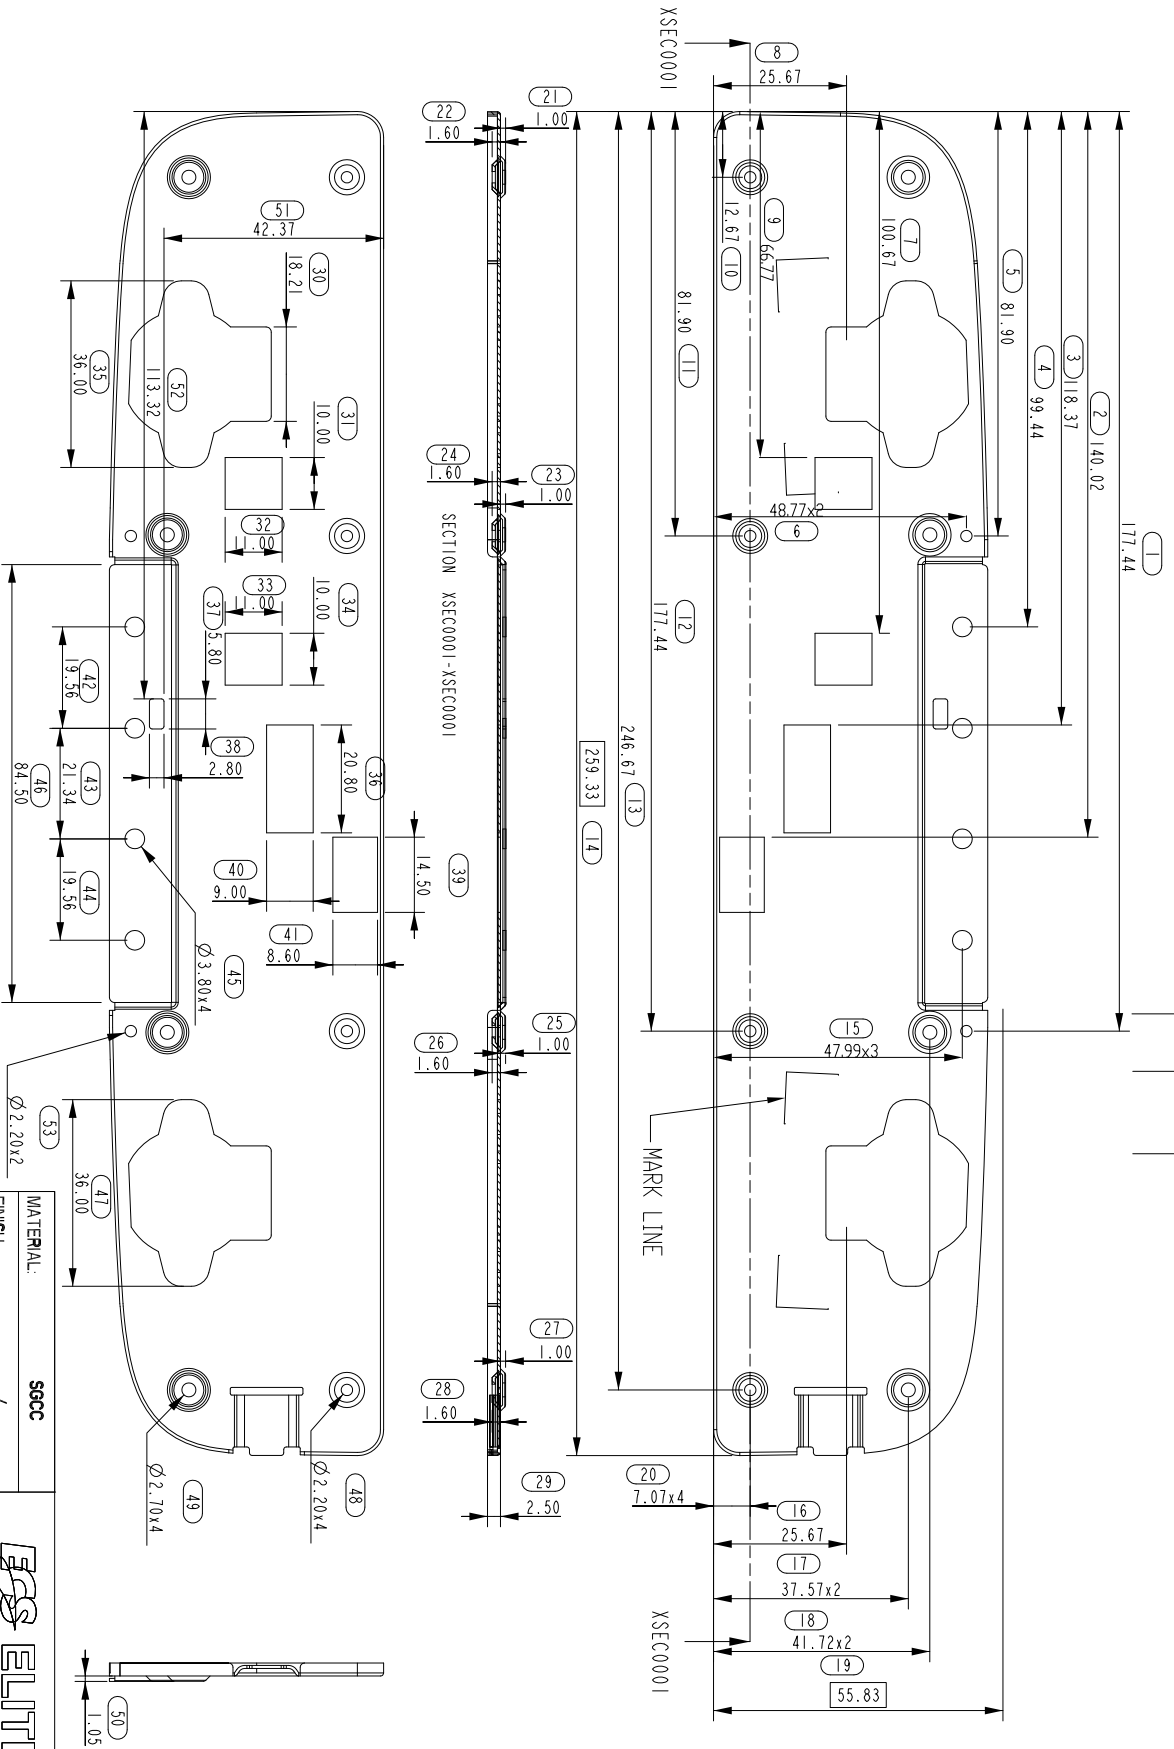


| SELECT V | V | 1 | 2 | 3 | 4 | 5 | 6 | EXTRA |
|----------|---|-------|-------|-------|-------|-------|-------|-------|
| 0-8 | | ±0.03 | ±0.05 | ±0.10 | ±0.15 | ±0.20 | ±1.00 | |
| 8-25 | | ±0.05 | ±0.10 | ±0.12 | ±0.20 | ±0.50 | ±1.50 | |
| 25-80 | | ±0.08 | ±0.12 | ±0.15 | ±0.30 | ±1.00 | ±2.00 | |
| 80-250 | | ±0.12 | ±0.15 | ±0.18 | ±0.40 | ±1.50 | ±2.50 | |
| 250- | | ±0.2 | ±0.20 | ±0.20 | ±0.50 | ±2.00 | ±4.00 | |

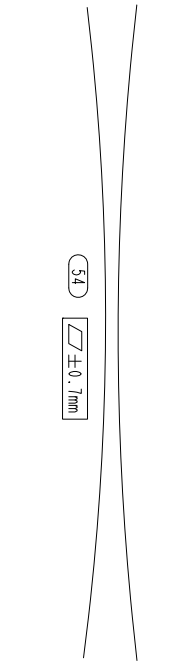

| | | | |
|---------------------------------------|--|--|--|
| MATERIAL: SGCC | | TITLE: PR_BKT_PALM_REST_ESIOIS2 | |
| FINISH: / | | FILE NAME: PR_BKT_PALM_REST_ESIOIS2 | |
| USED ON: ESIOIS2 | | PART NO: 20B060-FP8060 | |
| DRAWN/DATE: Fony Zhu 28-Apr-11 | | CHECK/DATE: Ben 28-Apr-11 | |
| DESIGN/DATE: Ben 28-Apr-11 | | APPROVE/DATE: | |
| CHECK/DATE: | | SIZE: 7/3 | |
| APPROVE/DATE: | | SHEET: 1 OF 1 | |

| REVISIONS | | DATE | APPROVED |
|-----------|------|-------------|----------|
| ITEM | AUTH | DESCRIPTION | |
| | | | |

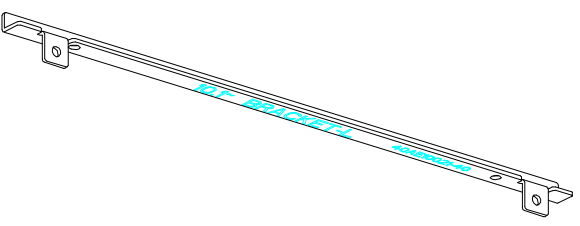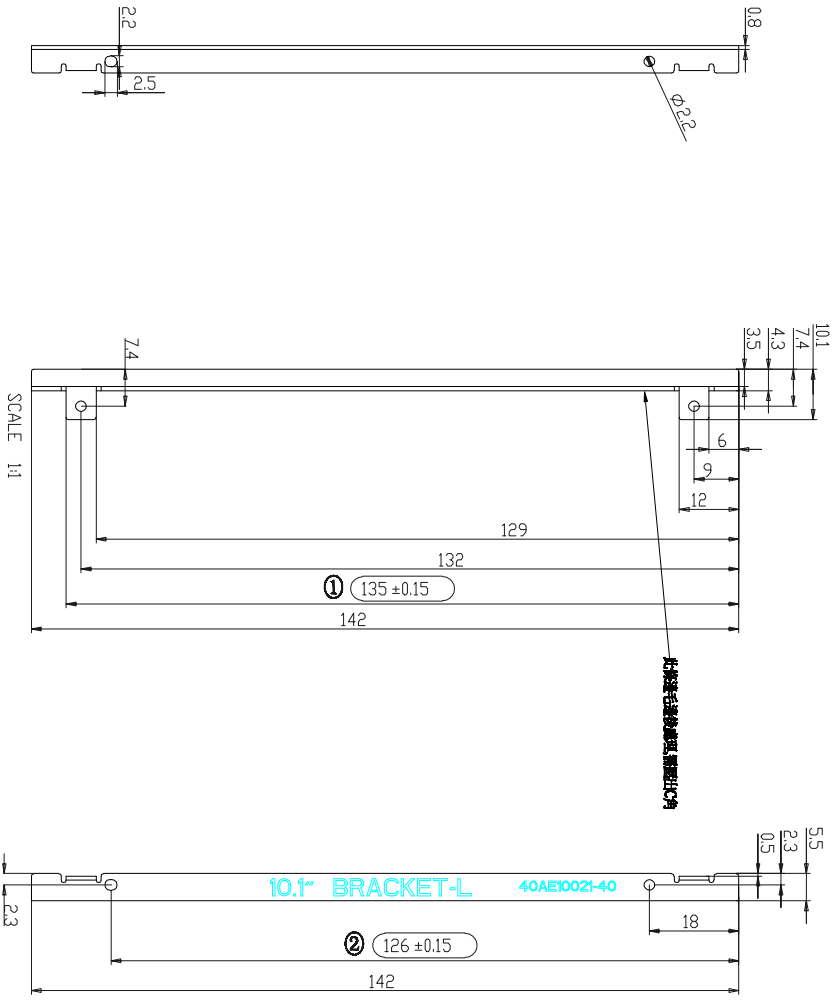

NOTES:
 1. ALL OF SURFACE SHOULD BE DEGREASED.
 2. AND SHARP EDGE AND BEND DETRIMENTATION ALLOWED.
 3. THE PART NUMBER HAVE TO BE STAMPED AT A PROPER LOCATION AGREED BY DESIGNER.
 4. DEGREASE BEFORE DELIVERY.
 5. GENERAL TOLERANCES SEE TABLE.
 6. Ⓢ FOR VENDOR SHIPMENT INSPECTION DIM.
 7. Ⓢ FOR INCOMING QI/QD INSPECTION DIM.




ES ELITEGROUP

| SELECT | V | V | V | V | V | V | EXTRA |
|---------|-------|-------|-------|-------|-------|-------|-------|
| DIM/TOL | 1 | 2 | 3 | 4 | 5 | 6 | |
| 0~8 | ±0.03 | ±0.05 | ±0.10 | ±0.15 | ±0.20 | ±1.00 | |
| 8~25 | ±0.05 | ±0.10 | ±0.12 | ±0.20 | ±0.50 | ±1.50 | |
| 25~80 | ±0.08 | ±0.12 | ±0.15 | ±0.30 | ±1.00 | ±2.00 | |
| 80~250 | ±0.12 | ±0.15 | ±0.18 | ±0.40 | ±1.50 | ±2.50 | |


| | | |
|---------------|-------------------|-------------------------------|
| MATERIAL: | S0CC (T=0.8mm) | |
| FINISH: | X | |
| USED DIM: | E10 | |
| DRAWN DATE: | Ben Kuo 24-Jun-09 | TITLE |
| DESIGN DATE: | Ben Kuo 24-Jun-09 | BRACKET-L FOR LCD 10.1" E10L1 |
| CHECK DATE: | | FILE NAME |
| APPROVE DATE: | | BRACKET-L FOR LCD 10.1" E10L1 |
| | | PART NO |
| | | 40AE10021-40 |
| | | SIZE |
| | | A3 |
| | | SHEET 1 OF 1 |

| REVISIONS | | DATE | APPROVED |
|-----------|-----------|---|----------------------|
| ITEM | AUTH | DESCRIPTION | |
| 1 | Lucas Ven | The ellipse hole extend from 25mm to 28mm | 2009/7/13 Leon XU |

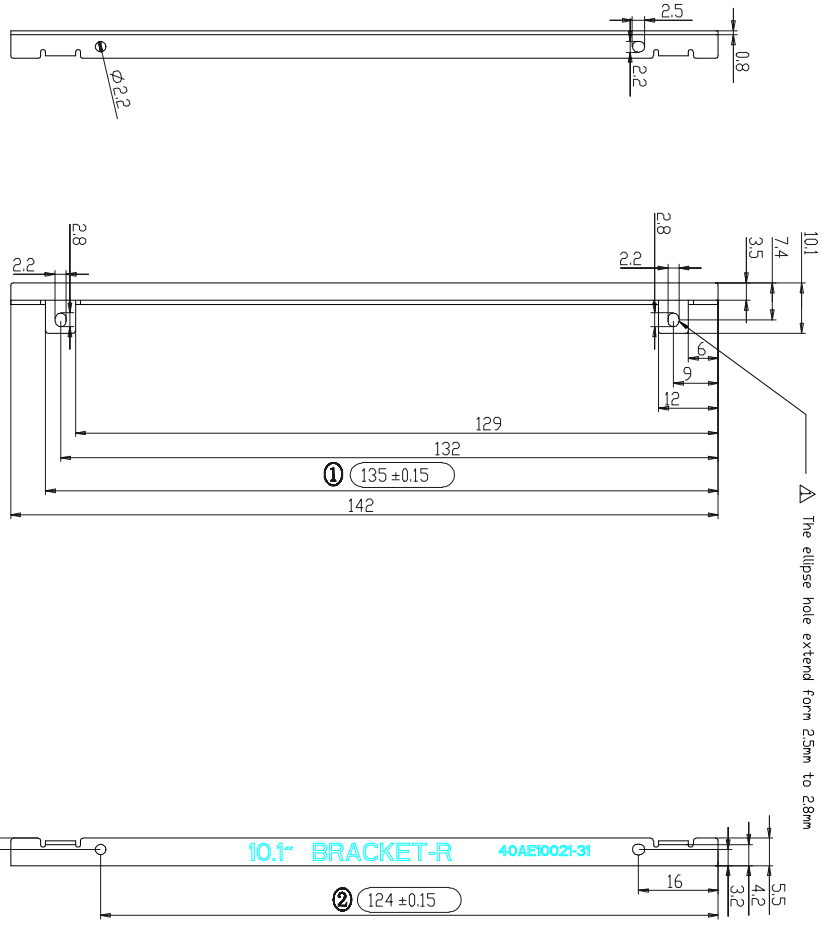

SCALE 1:1

SCALE 1:1



- NOTES:
1. ALL OF SURFACE SHOULD BE DEGREASED.
 2. AND SHARP EDGE AND BEND DEFORMATION ALLOWED.
 3. THE PART NUMBER HAVE TO BE STAMPED AT A PROPER LOCATION AGREED BY DESIGNER.
 4. DEGREASE BEFORE DELIVERY.
 5. GENERAL TOLERANCE SEE TABLE.
 6. ① - ② FOR VENDOR SHIPMENT INSPECTION DIM.
 7. ① - ② FOR INCOMING (IQC) INSPECTION DIM.



ELITEGROUP

| SELECT | V | V | V | V | V | V | EXTRA |
|---------|-------|-------|-------|-------|-------|-------|-------|
| DIM/TOL | 1 | 2 | 3 | 4 | 5 | 6 | |
| 0~8 | ±0.03 | ±0.05 | ±0.10 | ±0.15 | ±0.20 | ±1.00 | |
| 8~25 | ±0.05 | ±0.10 | ±0.12 | ±0.20 | ±0.50 | ±1.50 | |
| 25~80 | ±0.08 | ±0.12 | ±0.15 | ±0.30 | ±1.00 | ±2.00 | |
| 80~250 | ±0.12 | ±0.15 | ±0.18 | ±0.40 | ±1.50 | ±2.50 | |
| 250~ | ±0.2 | ±0.20 | ±0.20 | ±0.50 | ±2.00 | ±4.00 | |

| | | |
|---------------|-------------------|-----------------------------------|
| MATERIAL: | S30C (T=0.8mm) | |
| FINISH: | X | |
| USED DIM: | E10 | |
| DRAWN DATE: | Ben Kuo 24-Jun-09 | TITLE |
| DESIGN DATE: | Ben Kuo 24-Jun-09 | BRACKET-R FOR LCD 10.1" E10L1 R01 |
| CHECK DATE: | | FILE NAME |
| APPROVE DATE: | | BRACKET-R FOR LCD 10.1" E10L1 R01 |
| | | PART NO |
| | | 40AE10021-31 |
| | | SIZE |
| | | A3 |
| | | SHEET |
| | | 1 OF 1 |